



FICHE TECHNIQUE



VCF

VOLET COUPE-FEU

STANDARD CONSTRUCTION

MAXIMUM SIZE

Vertical Single section - 60" x 53" - and 52" Round
Horizontal Single section 34" x 53" and 52" Round

MINIMUM SIZE

Round: 4"
Vertical: 4" x 3"
Horizontal: 4" x 3"

FINISH

Mill


Fusible Link.

165 deg. F Standard

Horizontal & Vertical

U.L. Classified

1-1/2 Hour Rating

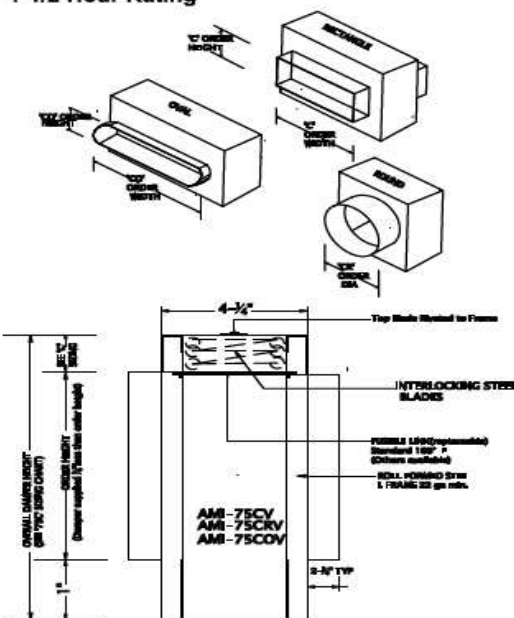

(V) VERTICAL MOUNT

FRAME

22 ga. Rollformed Steel frame

MULTIPLE SECTIONS ASSEMBLY

120" x 113" - Vertical
102" x 53" - Horizontal


BLADES

22 ga. Interlocking Steel Blades
'Out of the Air Stream'

OPTIONS:

- | | |
|---|---|
| ☐ 'C' Rectangular | ☐ Vertical Mount |
| ☐ 'CR' Round | ☐ Horizontal Mount |
| ☐ 'CO' Oval | ☐ 304 Stainless Steel Construction |
| ☐ 165 deg. F. Fusible Link | ☐ 212 deg. F. Fusible Link |

TYPE
C
CR
CO

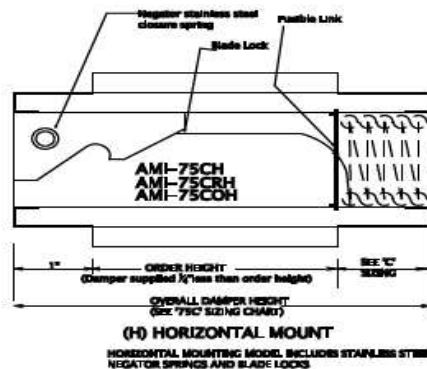

UNDERWRITERS LABORATORIES (ULSS)
CLASSIFIED FIRE DAMPERS
FIRE RESISTANCE RATED 1.5 HOURS.
FOR USE IN UL CLASSIFIED BUILDING
MATERIALS RATED 2 HOURS OR LESS.



FABRICANT ET GROSSISTE DE PRODUITS DE VENTILATION

215, boulevard Saint-Elzéar ouest
Laval (Québec) H7L 3N4

Téléphone : 450 663-8370
Sans-frais : 855 663-8370
Télécopieur : 450 663-8374

commande@ventimetal.com
info@ventimetal.com

RÉFÉRENCE :

INGÉNIEUR :

ARCHITECTE :

CONTRACTEUR :